

KCV06-20

单向阀 钢球型

说明 DESCRIPTION

A cartridge-style ball-type check valve

球阀式螺纹插装单向阀

工作 OPERATION



Pressure at ① overcomes the spring-bias ball and allows free flow from ① to ② .  
Flow in the opposite direction, from ② to ① ,is blocked by the ball.

当在①口的压力超过开启压力，①到②开启；  
在反方向，②到①关闭。

技术参数 SPECIFICATIONS


|                            |                                                                  |
|----------------------------|------------------------------------------------------------------|
| 工作压力 (Operating pressure): | 350bar                                                           |
| 额定流量 (Rated Flow):         | 20L/min                                                          |
| 内部泄漏 (Internal leakage):   | 2 drops/min(滴/分). max. at 20bar                                  |
| 开启压力 (Crack Pressures):    | 0.35=0.35bar<br>0.5=0.5bar<br>2.1=2.1bar<br>5=5bar               |
| 温度 (Temperature):          | -40° C to +120° C                                                |
| 过滤 (Filtration):           | 参考过滤要求 (Reference filter requirements)                           |
| 油液 (Fluids):               | Mineral-based fluids with viscosities of 7.4 to 420 cSt. (矿物油粘度) |
| 插孔 (Cavity):               | HVC06-2                                                          |

符号 SYMBOL

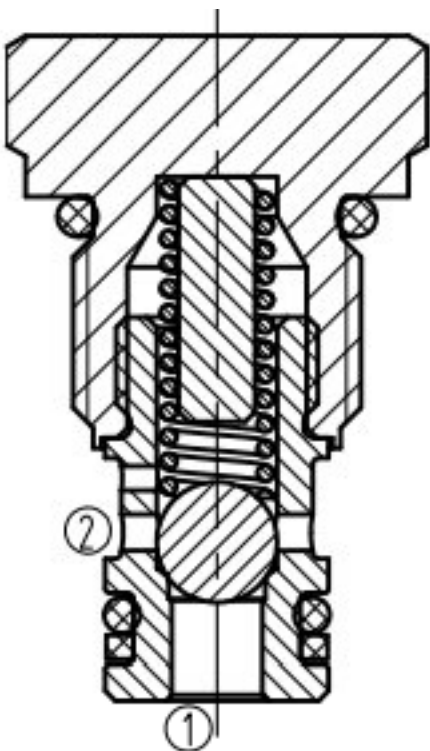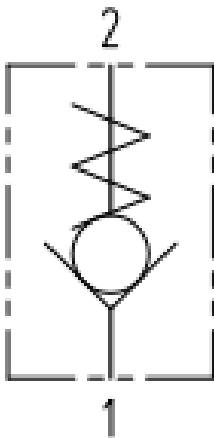


压力-流量曲线 PRESSURE DROP VS. FLOW

32cSt oil @ 40° C

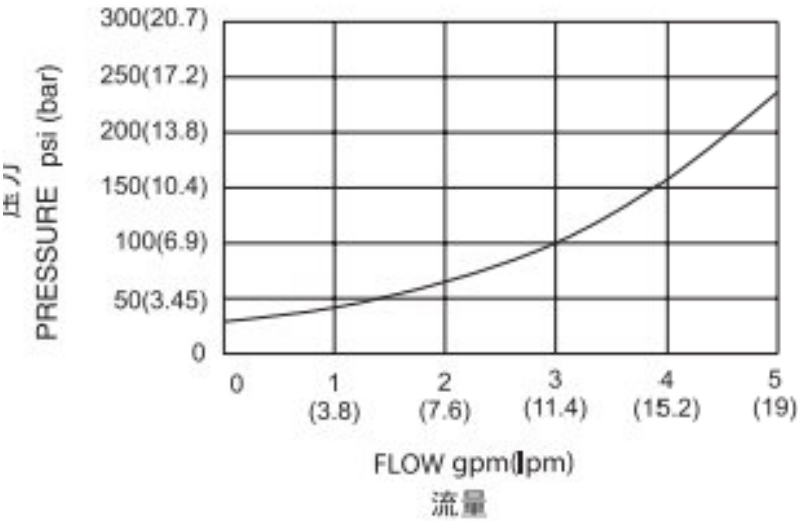

KCV06-20-0-N-5

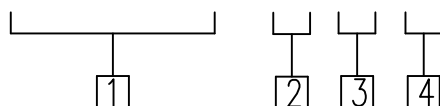

1 公司代码  
Company code

4 开启压力 (Cracking pressure)

0.35=0.35bar

0.5=0.5bar

2.1=2.1bar

5=5bar

2 0  
0= 只订插件  
0=Order plug-ins only

3 密封件 Sealing ring  
N 丁氰橡胶 (标准型)  
BUNA N (Std.)  
V 氟橡胶 Fluorocarbom

## 安装尺寸 INSTALLATION DIMENSIONS

