

KFR10-2C

流量控制阀， 压力补偿型

说明 DESCRIPTION


A cartridge-style adjustable pressure-compensated flow control valve

压力补偿可调型，插装式流量阀。

工作 OPERATION

The valve maintains a constant flow within specified accuracies from ① to ② regardless of downstream load pressure. When flow produces a minimum predetermined pressure differential across the compensator spool control orifice, the spool shifts against the spring force to throttle the flow and maintain the flow setting. Reverse flow is not regulated.


不管负载压力如何变化，从①到②口的流量都能保持在一定的范围内。当油通过固定节流孔时，引起极小的压力差，阀芯开始响应负载变化，通过压力补偿，可维持精确的流量。油液从②到①反方向流动，没有压力补偿。

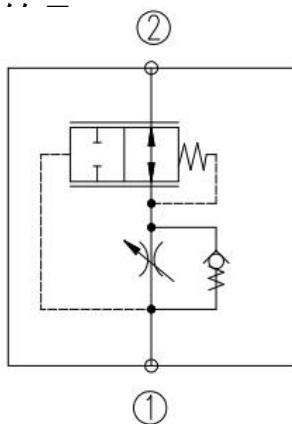


技术参数 SPECIFICATIONS

工作压力(Operating pressure):	350bar
额定流量(Rated Flow):	0.4-11.5L/min
流量控制精度(Flow Maintenance Accuracy):	±10%
温度(Temperature):	-40° C to + 120° C
过滤(Filtration):	参考过滤要求 (Reference filter requirements)
油液(Fluids):	Mineral-based fluids with viscosities of 7.4 to 420 cSt. (矿物油粘度)
插孔(Cavity):	VC10-2

压力-流量曲线 PRESSURE DROP VS. FLOW

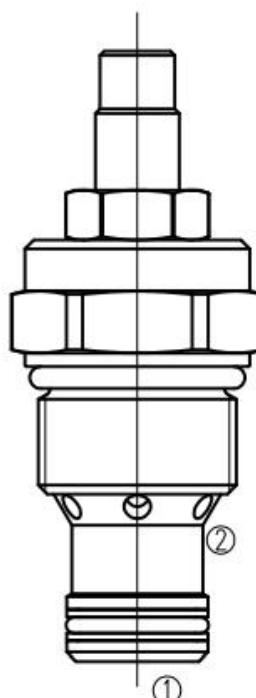

① to ② 压力流量曲线
Regulated Flow vs. Pressure Drop
46cSt oil @ 40°C

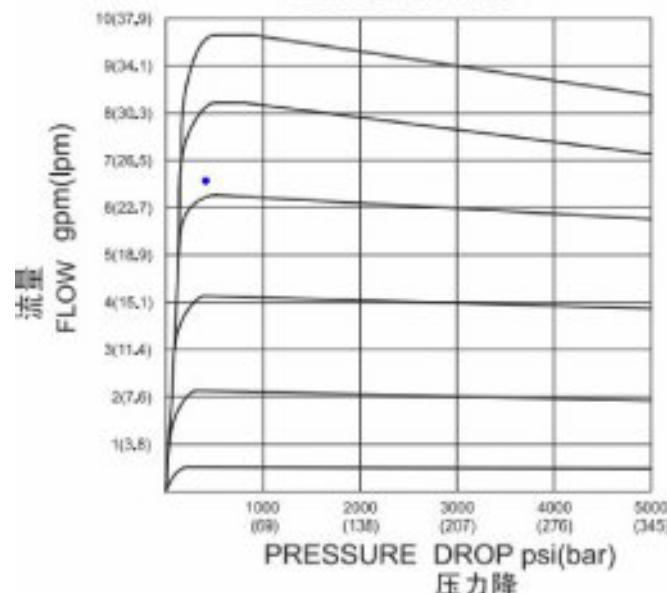

订货代号 TO ORDER

Page 2

KPD10-2C-0-*
[1] [2] [3]

[1] 公司代码
Company code

[2] 0
0= 只订插件
0=Order plug-ins only

[3] 密封件 Sealing ring
N 丁氰橡胶 (标准型)
BUNA N (Std.)
V 氟橡胶 Fluorocarbon

安装尺寸 INSTALLATION DIMENSIONS

