

KSV12-24T

滑阀，2通，常闭


说明 DESCRIPTION

Solenoid operated, two-way, normally closed, direct-acting, hydraulic threaded cartridge valves. used a two-way stop valve
电磁驱动、2通、常闭、直动滑式、液压螺纹插装阀、用作双向截止阀

工作 OPERATION

When power is off,the KSV12-24 stuts off the flow of oil in both directions.
When energized,the spool moves so that the oil can flow both directions.
断电时，KSV12-24 双向截止油液的流通. 通电时，阀芯移动使得油液可以双向流通



符号 SYMBOL




技术参数 SPECIFICATIONS

最大工作压力(Maximum working pressure):	240Bar
最大流量(Maximum flow):	78L/min
内部泄漏(Lnternal leakage):	Up to 164lm/min at 210bar(3000 psi)
温度(Temperature):	-20° C to - +100° C
过滤(Filtration):	参考过滤要求 (Reference filter requirements)
油液(Fluids):	Mineral-based fluids with viscosities of 7.4 to 420 cSt. (矿物油粘度)
插孔(Cavity):	VC12-2

压力-流量曲线 PRESSURE DROP VS. FLOW

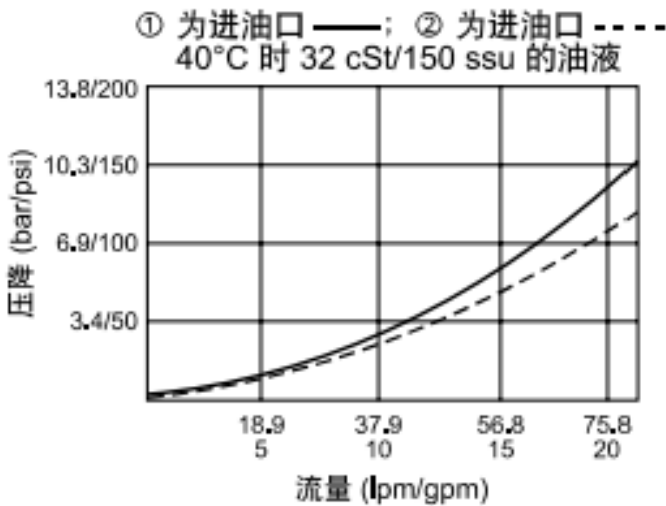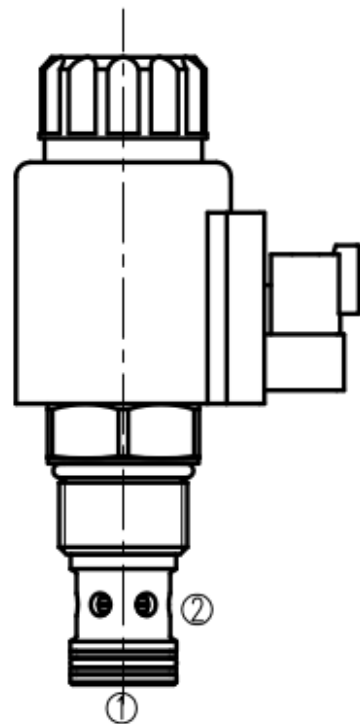

KSV12-24T-0-N-*-*



1 公司代码
Company code

4 电压Voltage
12= DC12
14= DC14
24= DC24
28= DC28

2 0
0= 只订插件
0=Order plug-ins only

3 密封件 Sealing ring
N 丁腈橡胶 (标准型)
BUNA N (Std.)
V 氟橡胶 Fluorocarbom

5 线圈终端 Coil terminal
标准线圈终端 (Standard coil terminal)
DG=Din 43650
DL=导线 (2)
E型线圈终端 (E-coil terminal)
ER=Deutsch DT04-2P
(符合IP69K的标准)

安装尺寸 INSTALLATION DIMENSIONS

