



湖南凯恩利液压 Hunan KEL Hydraulic

反比例减压阀 KDPRF08-38-0-N-24ER
Inverse Proportional Pressure Reducing Valve


尺寸图
Dimension

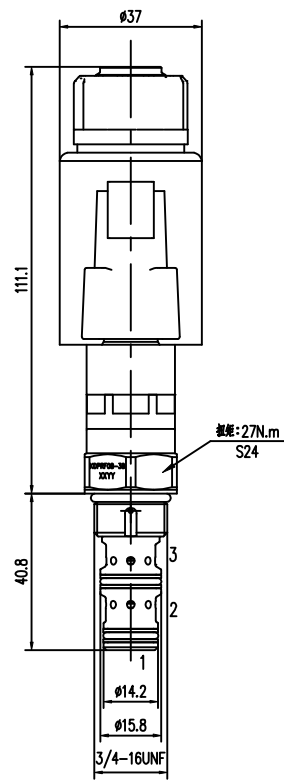

液压原理图
Hydraulic Diagram



压力曲线图
Pressure Characteristic Curve

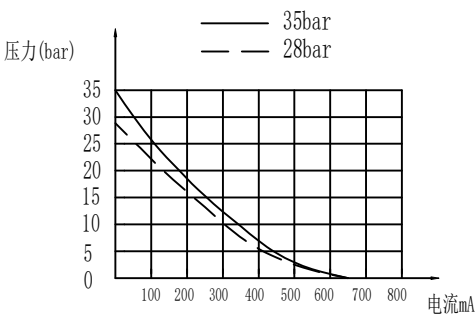


湖南凯恩利液压 Hunan KEL Hydraulic

反比例减压阀 KDPRF08-38-0-N-24ER
Inverse Proportional Pressure Reducing Valve

技术参数TECHNICAL DATA

1. 2口最高压力: 350bar 额定流量: 30L/min	1. Max Port 2 Pressure:350bar Rated Flow:30L/min
2. 电压: DC24V 接口: DT04-2P	2. Rated Voltage:DC24V Connector Type:DT04-2P
3. 电流控制范围: 0-650mA 对应压力输出: 35-0Bar	3. Current Control Range: 0-650mA Corresponding Pressure Output: 35-0Bar
4. 插孔: VC08-3	4. Port:VC08-3
5. 使用温度范围: -40℃~+90℃;	5. Operating temp: -40℃~+90℃
6. 油液清洁度要求: NAS9以内	6. Allowable: NAS Class 9 or better

订货代号 TO ORDER

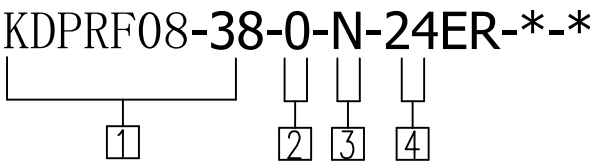

1 公司代号
KDPRF08-38= 反比例减压阀
Inverse Proportional Pressure Reducing Valve

2 只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶

4 电压 Rated Voltage
12 =DC 12V
24 =DC 24V