



湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KRV03D-20-50
Pressure Relief Valve


尺寸图
Dimension

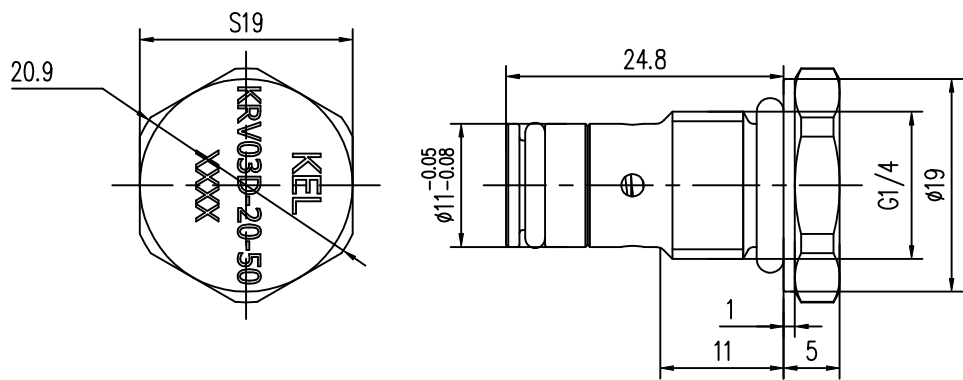

液压原理图
Hydraulic Diagram

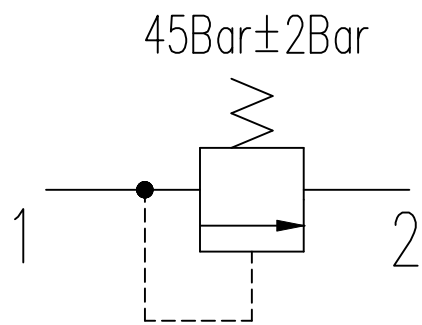

压力-流量曲线
Pressure Drop vs. Flow

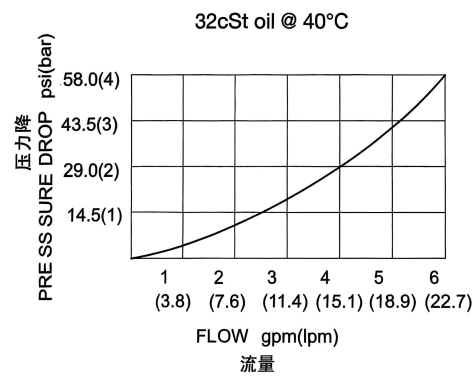

湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KRV03D-20-50
Pressure Relief Valve

技术参数TECHNICAL DATA

1. 额定流量: 10L/min
额定压力: 250bar

1. Rated Flow:10L/min
Rated Pressure:250bar
2. 溢流阀设定压力: 45Bar±2Bar

2. Pressure Relief Valve Setting Pressure:45Bar±2Bar
3. 泄露量: 在38 bar 时,
1到2不能超过5 滴/分钟

3. Leakage: ≤5 drops/min
between ports 1-2 at 38 bar
4. 使用温度范围: -40℃~+90℃;

4. Operating temp: -40℃~+90℃
5. 油液清洁度要求: NAS9以内


5. Allowable: NAS Class 9 or better
6. 应用要求: 不能用于主溢流,
只能用于安全溢流

6. Port:Application Requirement: Not for main
relief, only for safety relief
7. 外露部件: 镀锌镍合金,
单边厚度: 0.008-0.012mm

7. Exposed parts: Zinc-nickel alloy plated, unilateral
thickness: 0.008-0.012mm
8. 阀孔: KCV03D-2孔型(具体尺寸如下)

8. Port:KCV03D-2

孔型图 Hole Pattern Drawing

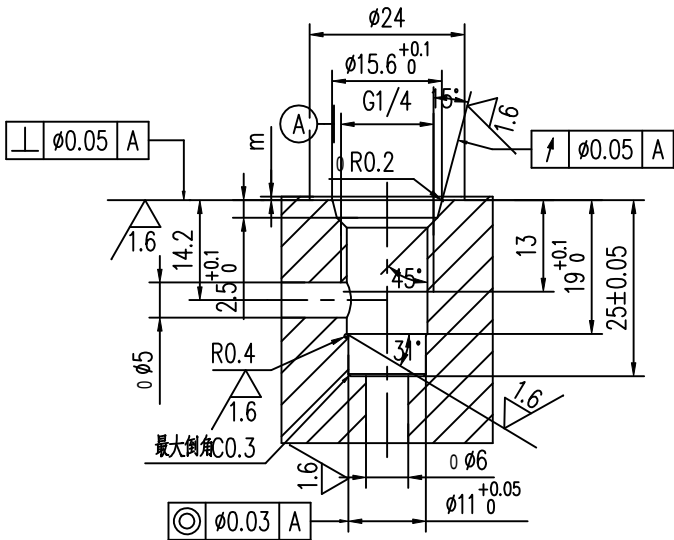

KCV03D-2孔型