


湖南凯恩利液压 Hunan KEL Hydraulic

两位三通电磁阀 KDCSD-04-M-24-D-F
2-Position 3-Way lectro magnetic valve


尺寸图

Dimension

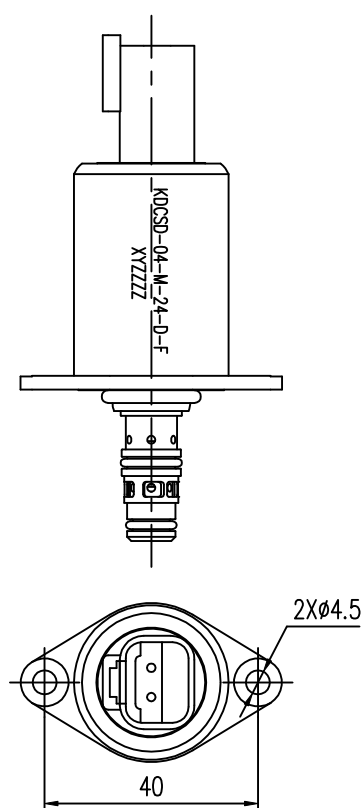



液压原理图

Hydraulic Diagram

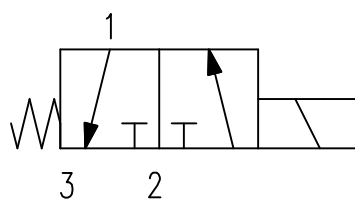

压力曲线图

Pressure Characteristic Curve

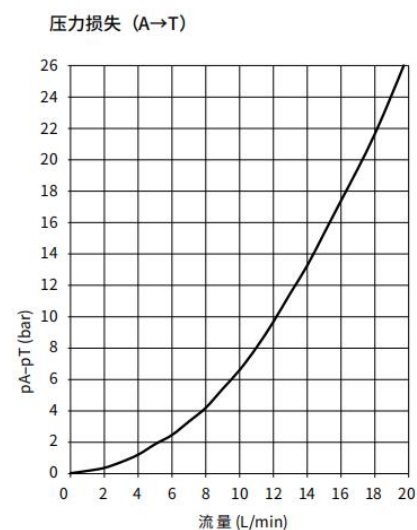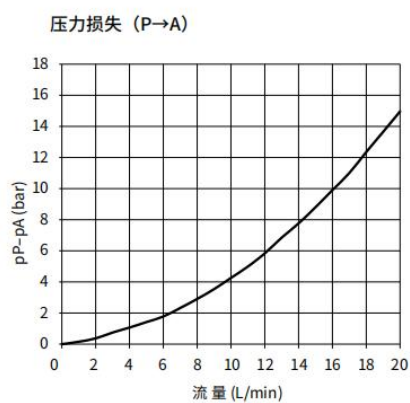

湖南凯恩利液压 Hunan KEL Hydraulic


两位三通电磁阀 KDCSD-04-M-24-D-F
2-Position 3-Way lectro magnetic valve

技术参数TECHNICAL DATA

1. 油口2最高压力: 50bar 油口3最高压力: 30bar	1.Port 2 Maximum Pressure:50bar Port 2 Maximum Pressure:50bar
2. 额定流量	2.Rated Flow:10L/min
3. 插孔: TC06025	3.Port:TC06025
4. 电器接口: DT04-2P	4.Electrical Connector: DT04-2P
5. 泄漏量< 100mL/min (失电) < 100mL/min (得电)	5.Leakage Quantity: < 100mL/min (Energized) < 100mL/min (De-energized)
6. 工作介质温度范围: -30~105℃	6.Working Medium Temperature Range:-30~105℃

孔型图

Hole Pattern Drawing

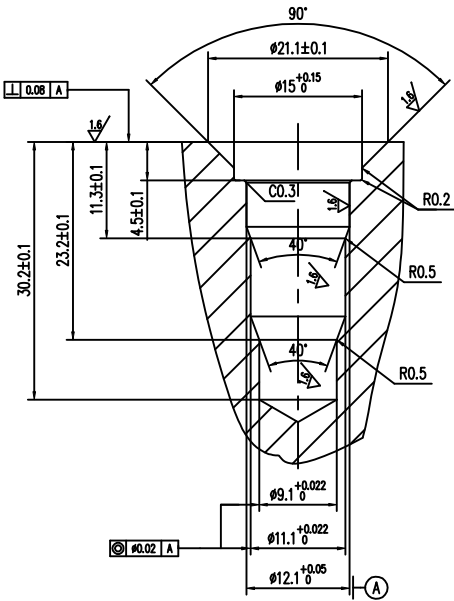


TC06025孔型

湖南凯恩利液压 Hunan KEL Hydraulic

两位三通电磁阀 KDCSD-04-M-24-D-F
2-Position 3-Way lectro magnetic valve

订货代号 TO ORDER

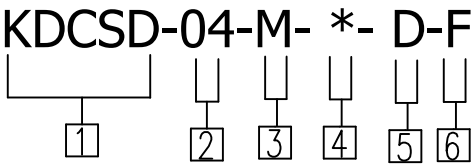

1 功能
KDCSD= 电磁阀 Solenoid Valve

4 电压Voltage: 12V
24V

2 规格 Size
04=04通径

5 连接器Connector :
德驰插头 DT04-2P

3 M=阀芯机能
Spool function

6 密封材料 :
F = 氟橡胶 FKM