



湖南凯恩利液压 Hunan KEL Hydraulic

比例流量阀 KPV72-20-0-N-24ER
Proportional Flow Control Valve



尺寸图
Dimension

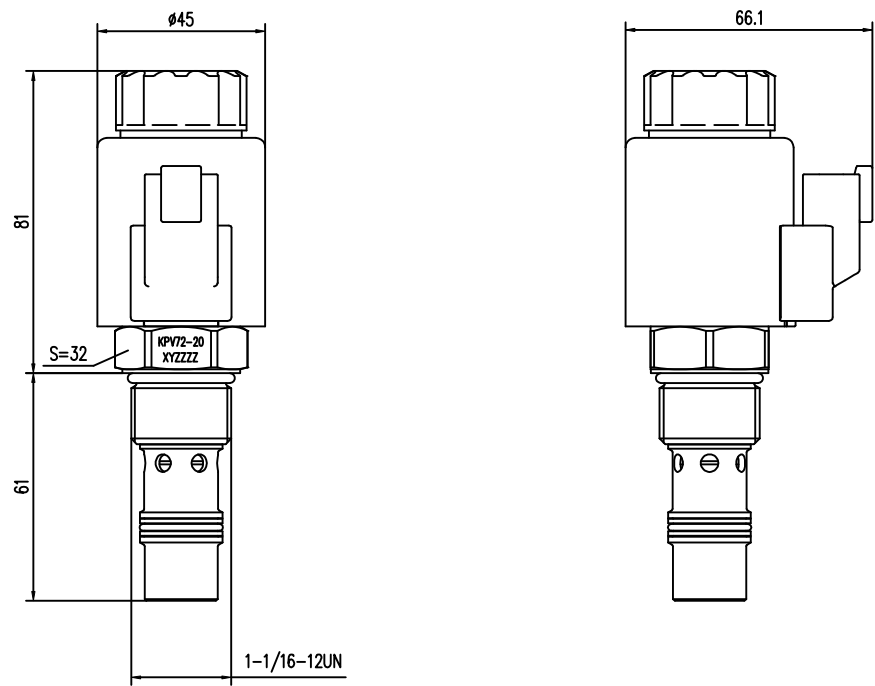

液压原理图
Hydraulic Diagram



性能图
Performance Chart

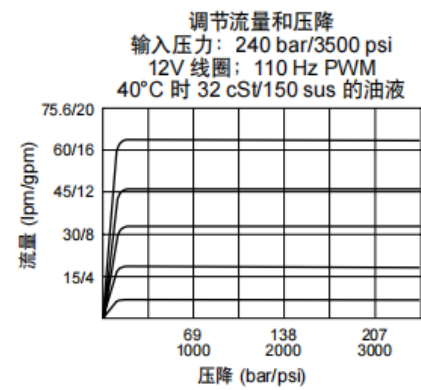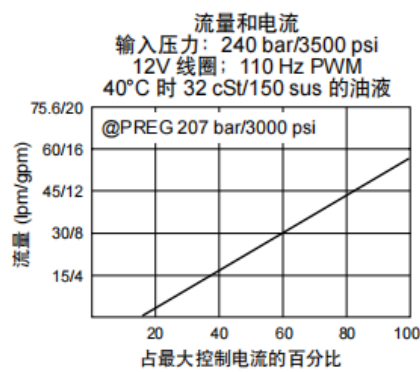


湖南凯恩利液压 Hunan KEL Hydraulic

比例流量阀 KPV72-20-0-N-24ER
Proportional Flow Control Valve

技术参数TECHNICAL DATA

1. 工作压力：油口①：240 bar (3500 psi)；油口②：207 bar (3000 psi)。
Working Pressure: Port ①: 240 bar (3500 psi); Port ②: 207 bar (3000 psi).
2. 调节流量：0~56 lpm (0~15 gpm)
Flow Adjustment: 0~56 lpm (0~15 gpm)
3. 内部泄漏：阀全闭时，207 bar (3000 psi) 压力时为0.38 lpm (0.1 gpm)
Internal Leakage: 0.38 lpm (0.1 gpm) at 207 bar (3000 psi) with valve fully closed.
4. 介质：粘度介于 7.4~420 cSt (50~2000 ssu) 的矿物油或具有润滑作用的合成油
Medium: Mineral oil or lubricating synthetic oil with viscosity between 7.4 - 420 cSt (50 - 2000 SSU)
5. 阀孔：VC12-2 Port:VC12-2

订货代号 TO ORDER

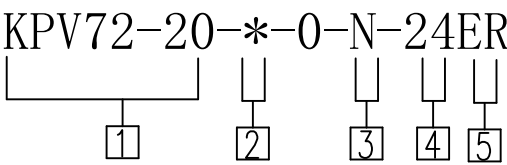

- 1 公司代号
KPV72-20= 比例流量阀
Proportional Flow Control Valve

2 选件 Option
无 （空白）
应急手控 Emergency Manual Override M

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶
- 4 电压 Rated Voltage
12 =DC 12V
24 =DC 24V

5 电线圈连接 Coil Connection
ER= Deutsch Connector(Water-proof Coil)
德意志插座(防水线圈) IP69
DG=Hirschmann 三插
DL= Double Lead 双线