



湖南凯恩利液压 Hunan KEL Hydraulic

单向阀 KCV06-20-0-N-0.5
Check Valve


尺寸图

Dimension

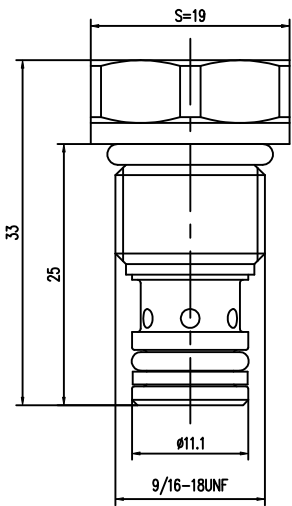


液压原理图

Hydraulic Diagram

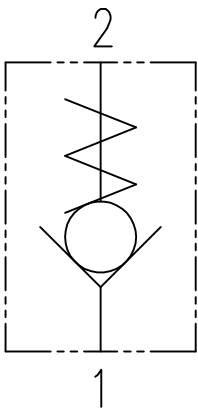

压力-流量曲线

Pressure Drop vs. Flow

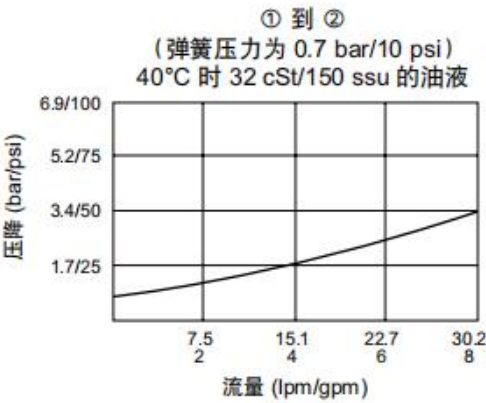

湖南凯恩利液压 Hunan KEL Hydraulic

单向阀 KCV06-20-0-N-0.5
Check Valve

技术参数TECHNICAL DATA

1. 额定流量: 20L/min
额定压力: 350bar

2. 单向阀开启压力: 0.5bar

3. 泄露量: 在 20bar时, Max 3 滴/分钟

4. 温度: -40℃~120℃

5. 油液粘度范围: 粘度介于7.4~420 cSt (50~2000 ssu) 的矿物油或具有润滑作用的合成油

6. 插孔: HVC06-2
1. Rated Flow:20L/min
Rated Pressure:350bar

2. Check Valve Cracking Pressure: 0.5 bar,


3. Leakage:Max. 3 drops/min at 20 bar

4. Operating temp:-40℃~120℃

5. Hydraulic Fluid Viscosity Range:
Mineral oil or lubricating synthetic oil with viscosity ranging from 7.4 to 420 cSt (50 to 2000 SSU)

6. Port:HVC06-2


孔型图
Hole Pattern Drawing

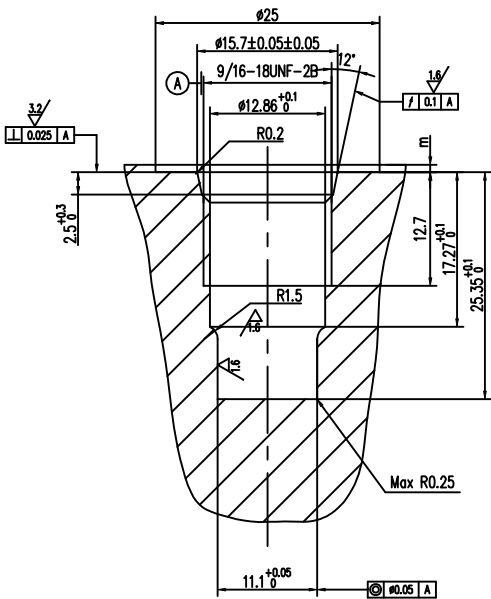

湖南凯恩利液压 Hunan KEL Hydraulic

单向阀 KCV06-20-0-N-0.5
Check Valve

订货代号 TO ORDER

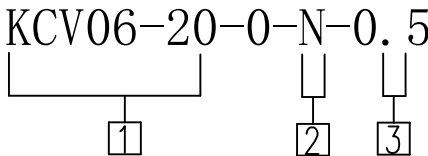

1 公司代号
KCV06-20=单向阀
Check Valve

2 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶

3 单向阀开启压力: 0.5 bar
Check Valve Cracking Pressure: 0.5 bar